

BM

Dual
glass
series

182P-144DG

Efficient bifacial PERC monocrystalline silicon half cells PV module



570 W

Maximum output power



22.07%

Maximum efficiency



0~+5W

Power tolerance

Boamax's long-term stable quality is trustworthy

- Automatic production line and leading photovoltaic technology
- Passed various long-term reliability tests
- EL testing is performed respectively before and after lamination, ensuring the reliability of the modules.
- Strict execute international standard management systems, including ISO 9001, ISO 14001, and ISO 45001.



Multi-Busbar welding design, optimizes optical and electrical properties of modules



POE sealing, enables effective resistance to various harsh environments



Fire-proof grade A, ensure more safety



The cell slicing technology .Significantly reduces the string current, reduces the loss of internal conversion efficiency, and effectively reduces BOS and LCOE




Optimized packaging materials and strict process scheme ensure the PID resistance of modules



Advanced non-destructive slicing technology, with small cell damage and reduce the risk of cracking

Industry leading linear warranty

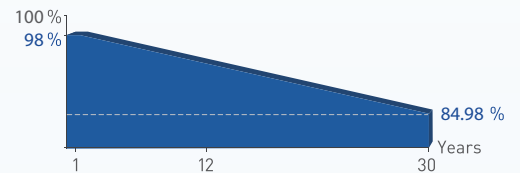

12year Product Warranty **30**year Power warranty

Excellent warranty, with a commitment to a 30-year power warranty and a linear power attenuation of 0.45%



Electrical Data (STC)

Peak Power	P _{max} (W)	530	535	540	545	550	555	560	565	570
Maximum Power Voltage	V _{mp} (V)	41.28	41.45	41.61	41.76	41.92	42.08	42.24	42.4	42.56
Maximum Power Current	I _{mp} (A)	12.84	12.91	12.98	13.05	13.12	13.19	13.26	13.33	13.4
Open Circuit Voltage	V _{oc} (V)	48.68	48.96	49.24	49.52	49.8	50.08	50.45	50.6	50.75
Short Circuit Current	I _{sc} (A)	13.68	13.73	13.78	13.83	13.88	13.93	13.87	13.95	14.02
Module Efficiency	(%)	20.52	20.71	20.90	21.10	21.29	21.48	21.68	21.87	22.07
Power Tolerance	(W)									0~+5

*STC : atmospheric mass AM1.5, irradiance 1000 W/m², cell temperature 25 °C

Electrical Data (NMOT)

Peak Power	P _{max} (W)	401	405	409	412	416	420	424	428	431
Maximum Power Voltage	V _{mp} (V)	38.00	38.23	38.45	38.67	38.90	39.12	39.34	39.56	39.78
Maximum Power Current	I _{mp} (A)	10.56	10.59	10.63	10.66	10.70	10.74	10.77	10.81	10.84
Open Circuit Voltage	V _{oc} (V)	45.95	46.21	46.48	46.74	47.01	47.28	47.55	47.82	48.09
Short Circuit Current	I _{sc} (A)	10.96	11.00	11.04	11.08	11.12	11.16	11.20	11.24	11.28

*NMOT : irradiance 800 W/m² ambient temperature 20 °C, wind speed 1 m/s

Electrical Data

Bifacial power gain (reference to 10 % irradiance ratio)

Peak Power	P _{max} (W)	567	572	578	583	589	594	599	604	609
Maximum Power Voltage	V _{mp} (V)	40.96	41.22	41.45	41.7	41.93	42.18	42.43	42.68	42.93
Maximum Power Current	I _{mp} (A)	13.85	13.89	13.94	13.98	14.04	14.08	14.12	14.16	14.20
Open Circuit Voltage	V _{oc} (V)	48.68	48.96	49.24	49.28	49.8	50.08	50.36	50.64	50.92
Short Circuit Current	I _{sc} (A)	14.63	14.69	14.75	14.8	14.85	14.91	14.97	15.03	15.09
Module Efficiency	(%)	21.95	22.14	22.37	22.57	22.80	22.99	23.19	23.38	23.57
Irradiation Ratio	sc(A)									10%

Structural Parameters

Number of Cells	144 pieces [6*24]
Module Dimension	2278*1134*35mm
Weight	32.0kg
Front Glass	2.0mm, High transmission coated glass
Back Glass	2.0mm, Semi-tempered glass
Frame	Anodized Aluminum alloy
Junction Box	IP68 rated
Cable	4mm ² , 300mm in length, length can be customized
Number of Diodes	3
Wind Pressure/Snow Pressure	2400 Pa/5400 Pa
Connector	MC4

Temperature Characteristic

Nominal operating cell temperature	45±2°C
Temperature coefficient (I _{sc})	+0.05%/C
Temperature coefficient (V _{oc})	-0.28%/C
Temperature coefficient (P _{max})	-0.34%/C

Packing Method

Modules per box	31 pieces
Modules per 40' container	620 pieces


Limit Parameters

Operating temperature	-40~+85°C
Maximum system voltage	1500V DC
Maximum rated current of fuse	30A


Optional Configuration

Connector	<input type="checkbox"/> Original PV
-----------	--------------------------------------

Module Dimension

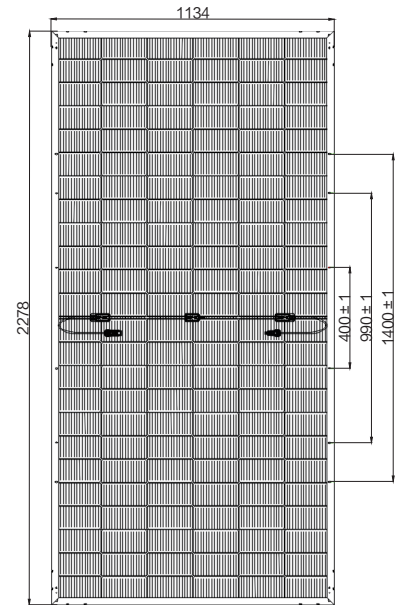


Back View

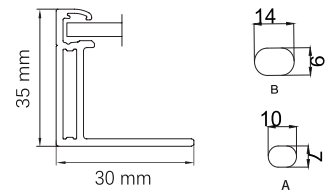

Curve Chart

I-V curves at different temperatures (570W)

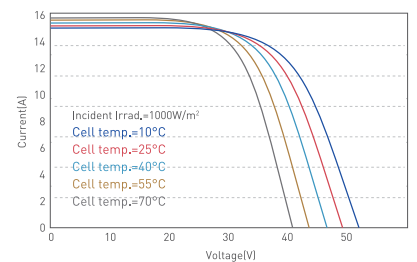

I-V curves/P-V curves at different irradiance (570W)

