

BM-HM Series **BM 210H-132DG**

Bifacial Dual Glass Monocrystalline Module

BM Dual glass series 210H-132DG

Efficient bifacial HJT monocrystalline silicon half cells PV module



730W

Maximum output power




23.5%

Maximum efficiency



0~+5 W

Power tolerance

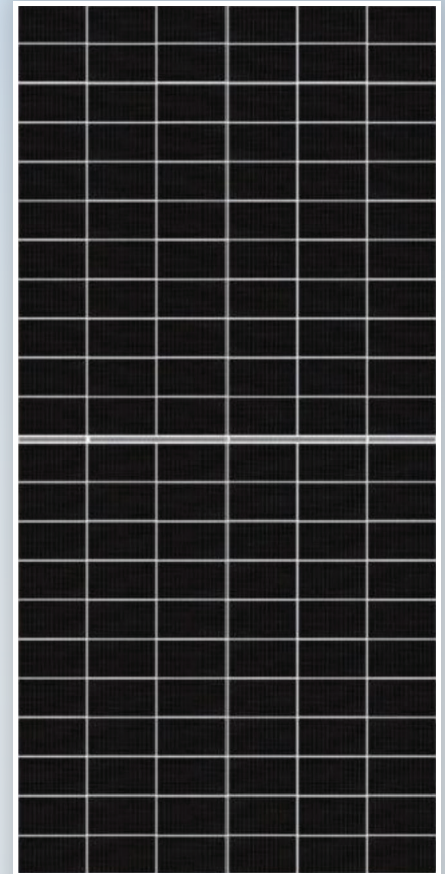

Boamax's long-term stable quality is trustworthy

- Automatic production line and leading photovoltaic technology
- EL testing is performed respectively before and after lamination, ensuring the reliability of the modules.
- Passed various long-term reliability tests
- Strict execute international standard management systems, including ISO 9001, ISO 14001, and ISO 45001.



Multi-Busbar welding design, optimizes optical and electrical properties of modules



POE sealing, enables effective resistance to various harsh environments



Fire-proof grade A, ensure more safety



The cell slicing technology. Significantly reduces the string current, reduces the loss of internal conversion efficiency, and effectively reduces BOS and LCOE




Optimized packaging materials and strict process scheme ensure the PID resistance of modules



Advanced non-destructive slicing technology, with small cell damage and reduce the risk of cracking

Industry leading linear warranty

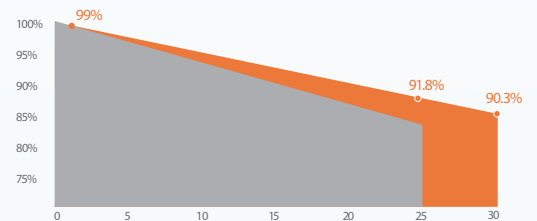

15year Product Warranty **30**year Power warranty

The attenuation in the first year is 1%, and from the second year onwards, the annual attenuation does not exceed 0.30%.



Electrical Data (STC)

Peak Power	P _{max} (W)	680	685	690	695	700	705	710	715	720	725	730
Maximum Power Voltage	V _{mp} (V)	41.49	41.65	41.80	41.95	42.10	42.25	42.40	42.54	42.70	42.85	43.00
Maximum Power Current	I _{mp} (A)	16.39	16.45	16.51	16.57	16.63	16.69	16.75	16.81	16.86	16.92	16.98
Open Circuit Voltage	V _{oc} (V)	49.50	49.66	49.82	49.98	50.13	50.29	50.45	50.61	50.77	50.93	51.09
Short Circuit Current	I _{sc} (A)	17.19	17.25	17.31	17.37	17.43	17.49	17.55	17.61	17.67	17.73	17.79
Module Efficiency	(%)	21.89	22.05	22.21	22.37	22.53	22.70	22.86	23.02	23.18	23.34	23.50
Power Tolerance	(W)	0~+5										

*STC : atmospheric mass AM1.5, irradiance 1000 W/m², cell temperature 25 °C

Electrical Data (NMOT)

Peak Power	P _{max} (W)	515	519	521	524	528	533	536	539	542	545	548
Maximum Power Voltage	V _{mp} (V)	39.08	39.18	39.29	39.39	39.50	39.60	39.69	39.78	39.87	39.96	40.05
Maximum Power Current	I _{mp} (A)	13.17	13.24	13.27	13.31	13.37	13.45	13.50	13.55	13.59	13.64	13.68
Open Circuit Voltage	V _{oc} (V)	47.12	47.29	47.46	47.63	47.80	47.97	48.14	48.31	48.48	48.65	48.82
Short Circuit Current	I _{sc} (A)	13.95	13.99	14.03	14.07	14.11	14.15	14.19	14.23	14.27	14.31	14.35

*NMOT : irradiance 800 W/m² ambient temperature 20 °C, wind speed 1 m/s

Electrical Data

Bifacial power gain (reference to 10 % irradiance ratio)

Peak Power	P _{max} (W)	750	755	760	765	770	775	780	785	790	795	800
Maximum Power Voltage	V _{mp} (V)	42.00	42.15	42.30	42.45	42.60	42.75	42.89	43.05	43.10	43.15	43.20
Maximum Power Current	I _{mp} (A)	17.86	17.91	17.97	18.02	18.08	18.13	18.19	18.23	18.33	18.42	18.52
Open Circuit Voltage	V _{oc} (V)	49.79	49.95	50.11	50.27	50.43	50.59	50.74	50.90	51.06	51.22	51.38
Short Circuit Current	I _{sc} (A)	18.37	18.44	18.51	18.58	18.65	18.72	18.79	18.86	18.93	19	19.07
Module Efficiency	(%)	24.14	24.31	24.47	24.63	24.79	24.95	25.11	25.27	25.43	25.59	25.75
Irradiation Ratio	s _c (A)	10%										

Structural Parameters

Number of Cells	132 pieces (6*22)
Module Dimension	2384*1303*35mm
Weight	38.7kg
Front Glass	2.0mm, High transmission coated glass
Back Glass	2.0mm, Semi-tempered glass
Frame	Anodized Aluminum alloy
Junction Box	IP68 rated
Cable	4mm ² , 300mm in length, length can be customized
Number of Diodes	3
Wind Pressure/Snow Pressure	2400 Pa/5400 Pa
Connectorr	MC4

Temperature Characteristic

Nominal operating cell temperature	45±2°C
Temperature coefficient (I _{sc})	+0.05%/°C
Temperature coefficient (V _{oc})	-0.28%/°C
Temperature coefficient (P _{max})	-0.34%/°C

Packing Method

Modules per box	31 pieces
Modules per 40' container	558 pieces


Limit Parameters

Operating temperature	-40~+85°C
Maximum system voltage	1500V DC
Maximum rated current of fuse	30A


Optional Configuration

Connector	Original PV
-----------	-------------


Module Dimension

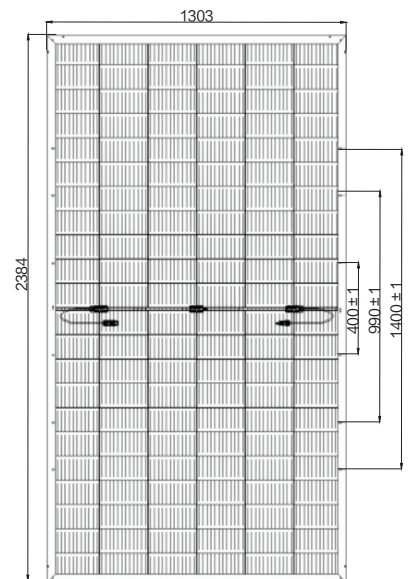

Back View



Curve Chart

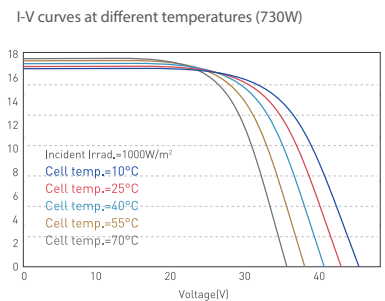

I-V curves/P-V curves at different irradiance (730W)

